




Are you looking for a method to dress your natural grass sports pitches in a sustainable, cost-effective method? Does your sports pitch need more aeration? Or do you want to create the best seeding conditions? With the Ecodresser you meet all requirements that you have set, with just one operation. The purchase and spreading of dressing soil is no longer necessary!

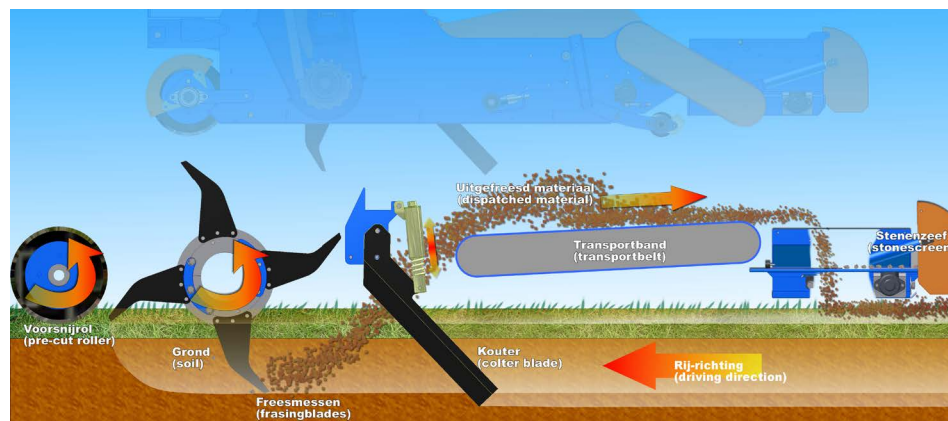

In the beginning of the 1990s, we and the Council of Rotterdam developed the predecessor of the Ecodresser. The Ecodresser extracts the desired dressing soil from the existing upper layer. Since you are using the dressing soil from your own sports pitch, you prevent unwanted soil and seeds from entering your pitch.

The Ecodresser is equipped with a cutting roller, which ensures minimal operating damage to the turf. The hook tines extract the dressing soil from the present upper layer, these hook tines are equipped with slipping. The coulters, which ensure the aeration of the upper layer, are spring-loaded. In order to prevent damage from stones in the pitch.

**THE WORKER IS KING**




**GKB**  
THE WORKER IS KING



As a result of the operation of the Ecodresser, you will create excellent seeding conditions. The Ecodresser opens the compacted areas, consequently, this stimulates the drainage and the development of the rooting of the grass.

With the Ecodresser you are in possession of the ultimate machine for the maintenance of your sports pitches or golf courses. Multiple operations are combined. The turf is intensively aerated (20 cm deep). At the same time the dressing is applied to the surface layer and the sub layer is aerated. Subsequently, it is possible to level the imperfections.

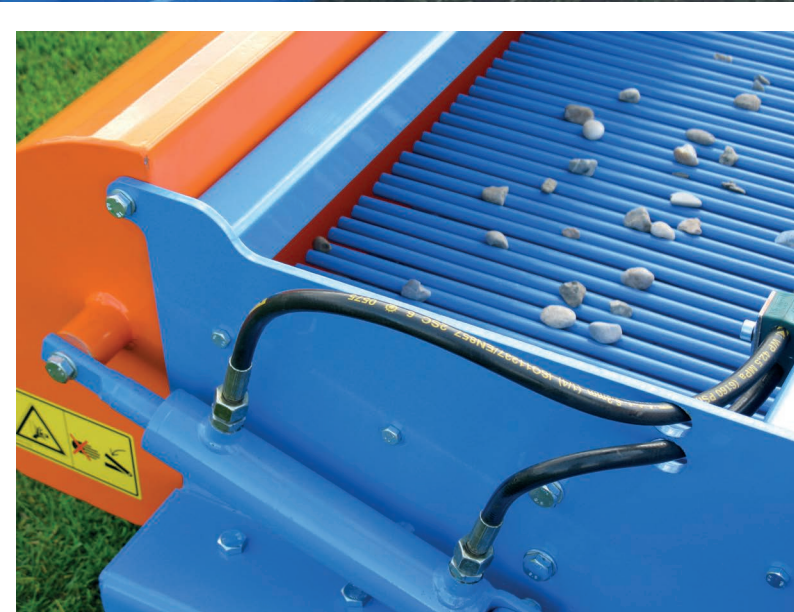

You can level imperfections in your pitch by carrying the recycled dressing soil on the conveyer belt, following you can scatter it on the desired area of the pitch. There is an option to equip the Ecodresser with a stone screen and collecting tray, in this way you are able to create a homogeneous upper layer.

The rotor that is positioned in the Ecodresser, is delivered with a slipper clutch. Thus, you can operate the Ecodresser on rough terrain. Furthermore, we assemble the Ecodresser with sprung coulters, these ensure the aeration of your pitch.



# Ecodresser

## Specifications:

Type	ED130	ED160	ED200	ED240
<b>Working width</b>	130 cm / 51"	185 cm / 73"	220 cm / 87"	250 cm / 98"
<b>Working depth</b>	0 - 20 cm / 0 - 8"	0 - 20 cm / 0 - 8"	0 - 20 cm / 0 - 8"	0 - 20 cm / 0 - 8"
<b>Dimensions (l x w x h)</b>	170 x 160 x 100 cm / 67 x 63 x 39"	245 x 220 x 135 cm / 96 x 87 x 53"	245 x 250 x 135 cm / 96 x 98 x 53"	260 x 280 x 135 cm / 102 x 110 x 53"
<b>Weight</b>	560 kg / 1240 lbs	1250 kg / 2760 lbs	1450 kg / 3200 lbs	1650 kg / 3640 lbs
<b>Power requirement</b>	30 - 50 hp + creeper gear	65 - 95 hp + creeper gear	80 - 110 hp + creeper gear	90 - 120 hp + creeper gear
<b>Option 1</b>	n/a	Stonescreen 160	Stonescreen 200	Stonescreen 240
<b>* Dimensions + Stonescreen (l x w x h)</b>	n/a	320 x 220 x 135 cm	320 x 250 x 135 cm	320 x 280 x 135 cm
<b>* Weight + Stonescreen</b>	n/a	1490 kg / 3290 lbs	1730 kg / 3820 lbs	1950 kg / 4300 lbs


**The following specifications are only applicable to the ED160, ED200 en de ED240:**

<b>Hydraulics</b>	1x single acting hydraulic valve open up soil collection cover
<b>* Hydraulics</b>	1x double working hydraulic valve Power-Arm
<b>* Hydraulics</b>	1x double working hydraulic valve stone collection container

*\* specification is only applicable in combination with Option 1: Stonescreen*

**The following specification is applicable to every Ecodresser model:**

<b>Linkage</b>	Standard three-point hitch cat. I - II
----------------	--



**THE WORKER IS KING**